

FOR RoHS

C4 Revision x 21pcs


A

B

C

D

E

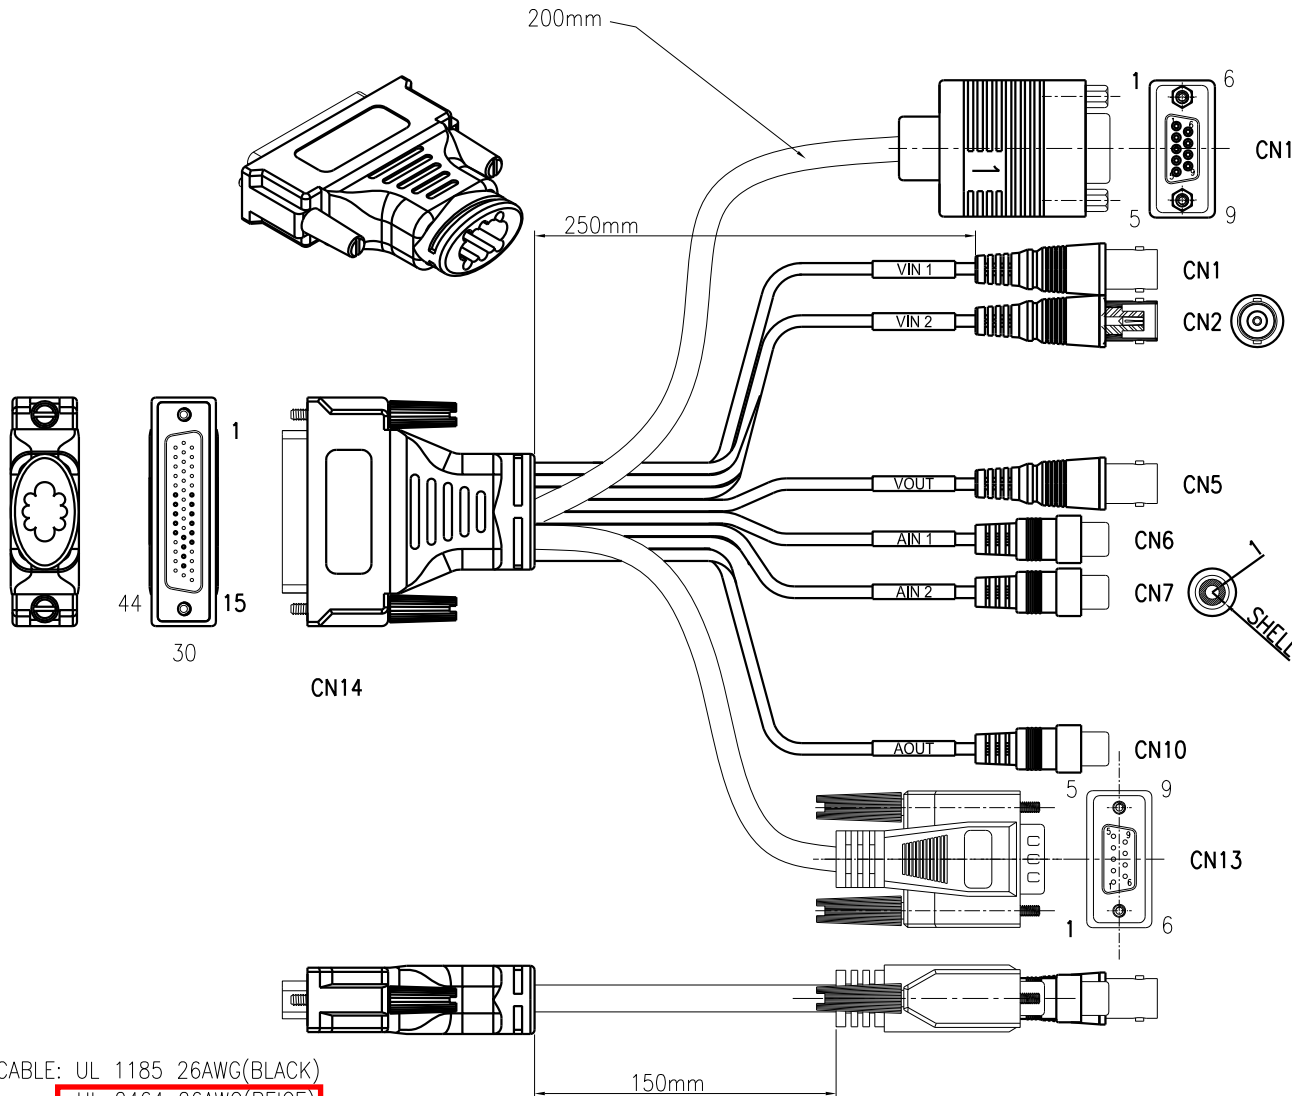

	CN14 (H.D. 44M)	CN11 (D-SUB 9F)	CN13 (D-SUB 9M)
VDIN1	1 — CN1 CNETER		
VDIN2	2 — CN2 CNETER		
NC	3		
NC	4		
VDOUT	5 — CN5 CNETER		
ALM1	6	1	
ALM3	7	3	
ALM OUT	8	6	
LED 00	9		
LED 02	10		
LED 04	11		
BOTM	12		
RS RXD	13		2
RS TXD	14		3
NC	15		
GND	16 — CN1 SHELL		
GND	17 — CN2 SHELL		
GND	18		
GND	19		
GND	20 — CN5 SHELL		
GND	21 — CN6 SHELL		
GND	22 — CN7 SHELL		
GND	23		
GND	24		
GND	25 — CN10 SHELL		
GND	26		
GND	27		
GND	28	5	
GND	29	8/9	
GND	30		5
AUIN1	31 — CN6 CNETER		
AUIN2	32 — CN7 CNETER		
NC	33		
NC	34		
AUOUT	35 — CN10 CNETER		
ALM2	36	2	
ALM4	37	4	
ALM COM	38	7	
LED 01	39		
LED 03	40		
NC	41~44		
GND	SHELL	SHELL	SHELL

CABLE: UL 1185 26AWG(BLACK)

UL 2464 26AWG(BEIGE)

CN1/CN2/CN5: BNC CONN. FEMALE TYPE(PVC: BLACK)

CN6/CN7/CN10: RCA JACK(PVC: BLACK)

CN11: D-SUB 9P FEMALE TYPE

(PVC: BLACK)

CN13: D-SUB 9P MALE TYPE(PVC:BEIGE)

CN14: H.D. 44P MALE TYPE(PVC: WHITE)

SHRINK TUBE: WHITE(WORD: BLACK)

TOLERANCE

X.	±
.X	±
.XX	±
.XXX	±

REV.	DESCRIPTION	DATE
A		Sep.30.11'

E.I.CE-<sup>®</sup>CALL ENTERPRISE CO.,LTD.

TITLE: EMV2005 I/O Cable  
(自有品牌用線)

PART NO: 0130-50X-0253

DWG NO: 0930XX-C1502

APPD:	MAT'L:
CHKD:	BODY:
DRWN: Wen,Kai	CLIENT: 15-19

UNITS	SCALE	SHEET